

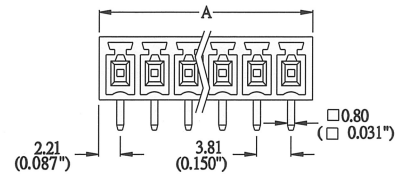






Printed Circuit Board Connectors

Headers • Closed 90° • Pitch:3.81 mm

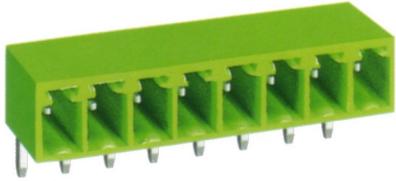

Material

Solder pin:	□ 0.8 mm, Brass, Tin plated
Insulating Body:	Polyamide66 (UL94V-0)
Color:	Green

Environmental

Operation temperature:	-55 °C to +105 °C
Short-time temperature:	Up to 250 °C (+482 °F)

Electrical

Current rating:	12 amp AC300V
Insulation withstanding volt:	AC2000V min
Insulation resistance:	>5000Ω at DC500V
PDB hole Diameter:	φ 1.3 mm

Item No.	Poles	A (mm)	A (inch)
H-030-38102	2	8.23	0.324
H-030-38103	3	12.04	0.474
H-030-38104	4	15.85	0.624
H-030-38105	5	19.66	0.774
H-030-38106	6	23.47	0.924
H-030-38107	7	27.28	1.074
H-030-38108	8	31.09	1.224
H-030-38109	9	34.90	1.374
H-030-38110	10	38.71	1.524
H-030-38111	11	42.52	1.674
H-030-38112	12	46.33	1.824
H-030-38116	16	61.57	2.424