


# AVK 2,5-4T Yellow-Green

**Klemsan**

334120

4mm<sup>2</sup> Screw type,single deck earth terminal block

Category: Screw Type Terminal Blocks  
Type: Grounding Terminals  
Group: Terminal Blocks

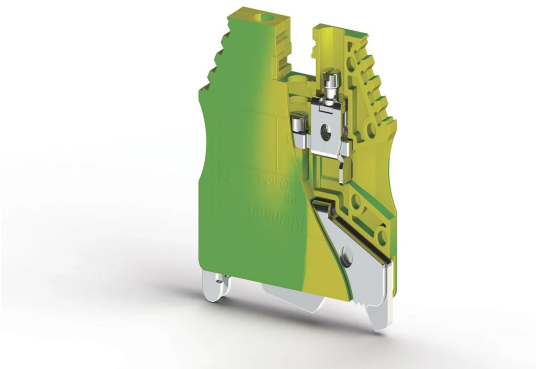

## Commercial Information

Package Unit	50 pcs.
Customs Tariff Number	853690950000
Weight Per Unit Including Packaging	0,0164

## Technical Information

PRODUCT FEATURES	
Number of Connections	2
Color	Yellow/Green
Number of Levels	1
Protective Conductor Type	PE
Insulation Material	PA

UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-2
Continuous Operating Temperature max.	120
Continuous Operating Temperature min.	-55
Note	Observe the current carrying capacity of the DIN rails.
<b>ELECTRICAL FEATURES</b>	
Nominal Impulse Voltage	8
<b>CONNECTION DATA</b>	
Connection Type	Screw Connection
Single-core min. conductor cross-section	0,2
Single-core max. conductor cross-section	6
Conductor cross-section AWG/kcmil min.	24
Conductor cross-section AWG/kcmil max.	10
Multi-core min. conductor cross-section	0,2
Multi-core max. conductor cross-section	6
Multi-core min. conductor cross-section with ferrule	0,25
Multi-core max. conductor cross-section with ferrule	4
2 conductors of the same cross-section, multi-core, twin ferrule with plastic sleeve, min.	0,5

2 conductors of the same cross-section, multi-core, twin ferrule with plastic sleeve, max.	2,5
Min. Stripping Length	9
Max. Stripping Length	10
Internal cylindrical indicator	A4
Tightening torque, min	0,5
Tightening torque, max.	0,8
Rail Tightening Torque Min.	0,4
Rail Tightening Torque Max.	0,6
<b>DIMENSIONS</b>	
Width	6
Length	42
Height MR 35x7.5	44,5
Height MR 35x15	52