

Product datasheet:

## Enlarging fittings nickel-plated brass increased safety Ex e II

**Outer thread metric or Pg**

**Approval type: Erweiterung MS EX**


- Outer thread Pg
- Inner thread metric
- with O-ring
- 2 = Certificate SEV 15 ATEX 0152X / IECEx SEV 15.0019X
- The norm interdicts to screw several reduction/enlarging fittings into each other!



<b>Article no.:</b>	<b>EX3600.13.20</b>
E-No:	000000000
EAN:	7611614175027
Delivery:	50

### Dimensions / Form

Product length:	6 mm
Spanner size:	24 mm
External thread:	Pg 13
Internal thread:	M20x1.5
Dimension H:	10.5 mm
Dimension L:	6 mm

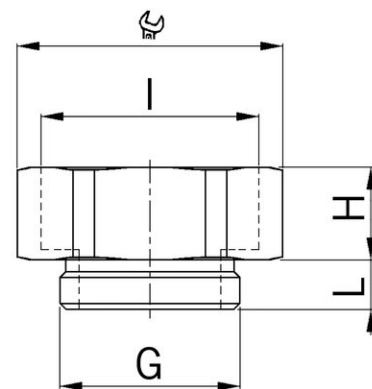

### Connections / Entries

clamp technology:	Compression technology
-------------------	------------------------

### Features

Product type:	expansion
---------------	-----------



### Approvals / Certifications

Protection class:	IP66
Explosion-proof design:	Yes
EX zone:	Gas 1 and 2 - Dust 21 and 22
Gas:	II 2G Ex eb IIC Gb
Dust:	II 2D Ex tb IIIC Db
Test standard:	IEC EN 60079-7
IECEx certification:	IECEx SEV 15.0018
Further certifications:	SEV 15 ATEX 0151
Connectivity certification:	SEV 15 ATEX 0151

### Storage / Installation / Operation

Minimum operating temperature:	-60 °C
--------------------------------	--------

## Product datasheet:

Maximum operating temperature: \_\_\_\_\_ 100 °C