

Product datasheet:

Enlarging fittings nickel-plated brass increased safety Ex e II

Outer thread metric or Pg

Approval type: Erweiterung MS EX


- Outer thread Pg
- Inner thread metric
- with O-ring
- 2 = Certificate SEV 15 ATEX 0152X / IECEx SEV 15.0019X
- The norm interdicts to screw several reduction/enlarging fittings into each other!



Article no.:	EX3600.21.40
E-No:	000000000
EAN:	7611614175140
Delivery:	20

Dimensions / Form

Product length:	7.5 mm
Spanner size:	46 mm
External thread:	Pg 21
Internal thread:	M40x1.5
Dimension H:	14.0 mm
Dimension L:	7.5 mm

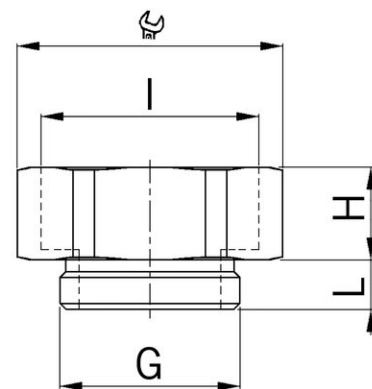

Connections / Entries

clamp technology:	Compression technology
-------------------	------------------------

Features

Product type:	expansion
---------------	-----------



Approvals / Certifications

Protection class:	IP66
Explosion-proof design:	Yes
EX zone:	Gas 1 and 2 - Dust 21 and 22
Gas:	II 2G Ex eb IIC Gb
Dust:	II 2D Ex tb IIIC Db
Test standard:	IEC EN 60079-7
IECEx certification:	IECEx SEV 15.0018
Further certifications:	SEV 15 ATEX 0151
Connectivity certification:	SEV 15 ATEX 0151

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
--------------------------------	--------

Product datasheet:

Maximum operating temperature: _____ 100 °C