


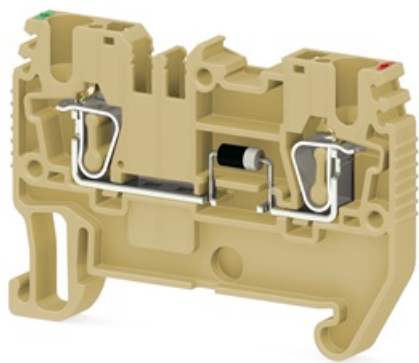

Klemmsan®

311060 SRD 2.5 D_A

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V0
	Packing Unit	50
	Weight (g)	—
Dimensions	Width	5,2 mm
	Length	50,20 mm
	Height (MR 32)	— mm
	Height (MR 35x7.5)	37,30 mm
TSE / CE Technical Data	Nominal Voltage	800 V ~
	Nominal Current	1 A (2.5 mm ² için) / 1 A (at 2.5 mm ²) A
	Cross Section	mm ²
	Norm	EN60947-7-1
VDE Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	mm ²
	VDE Norm	
UL / CSA Technical Data	Nominal Voltage	V ~
	Nominal Current	A
	Cross Section	AWG/28-12
ATEX Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	
Connection Data	Minimum solid strand cross section	0,08 mm ²

	Maximum solid Strand cross section	4 mm ²
	Minimum fine Strand cross section	0,14 mm ²
	Maximum fine strand cross section	2,5 mm ²
	AWG Conductor Range	28-12
	Connection Type	Yaylı bağlantı / Spring connection
	Insulation Stripping length	10 mm
	Tightening torque	— Nm

UL Sertifikası - UL Certificate

Rusya Onaylı Denizcilik Sertifikası - Rusya Denizcilik Certificate

Avrupa standartlarına uygunluk belgesi - CE Certificate

	Order Info
■	311069
■	311060
┌	311066
■	311065