




CRIMP-MAX MC 25

AUTOMATIC FERRULE STRIPPING & CRIMPING MACHINE

FOR 20 AWG TO 14 AWG WIRES


YOUR EFFICIENT HELPER FOR STRIPPING & CRIMPING INSULATED WIRE FERRULES

- THE MC 25 AT 26 POUNDS (12 KG) IS A VERY LIGHT MACHINE. IT CAN BE EASILY TRANSPORTED TO VARIOUS WORK STATIONS.
- IT DOES NOT REQUIRE PRESSURIZED AIR, BUT ONLY A 120 V STANDARD POWER CONNECTION.
- IT TAKES ONLY 1.5 SECONDS TO STRIP AND CRIMP THE INDIVIDUAL WIRES.
- THE MC 25 PROCESSES WIRE FERRULE SIZES 20 AWG TO 14 AWG (0.5 TO 2.5 SQUARE MILLIMETERS) IN THE STANDARD LENGTH OF 8 MM.
- YOU CAN CHANGE THE CRIMP MECHANISM FOR THE SIZE OF THE FERRULES IN A MATTER OF SECONDS WITHOUT ANY ADDITIONAL TOOLS - SIMPLY SNAP IT IN AND IT IS READY TO GO.
- ALL THE CRIMP MECHANISMS NECESSARY ARE CLEARLY LAID OUT IN THE CASE PROVIDED.
- AN ADVANCED MICROPROCESSOR-CONTROLLED CAM DRIVE ENSURES RELIABLE OPERATION.
- THE WIRE FERRULES IN REEL FORM ARE FED VIA A DISPENSER FITTED TO THE RIGHT SIDE OF THE MACHINE FOR EASY HANDS FREE OPERATION.
- THE INSULATED FERRULES USED FOR THIS MACHINE COME IN 1000 PIECE OR 500 PIECE REELS (TAPED MOUNTED) PACKAGED IN A COMPACT CARDBOARD CASE AND ARE FED INTO THE MACHINE AUTOMATICALLY.
- THE MACHINE HAS AN INTEGRAL REEL HOLDER WHICH KEEPS THE FERRULES IN PLACE DURING OPERATION.

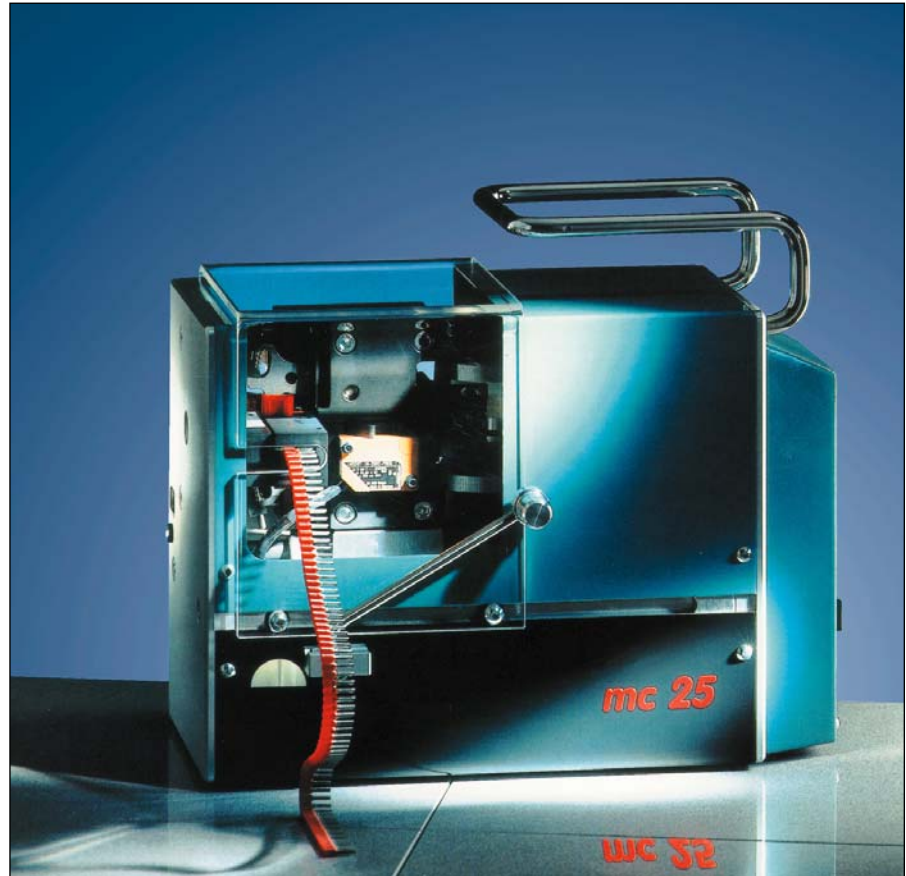

MC 25 TECHNICAL DATA

POWER SUPPLY:	120 VAC / 60 HZ
POWER CONSUMPTION:	80 VA
OPERATING RANGE:	20 - 14 AWG (0.5 - 2.5 SQUARE MILLIMETERS)
WIRE FERRULES:	IN ACCORDANCE WITH DIN 46 228 PART 4 TAPE MOUNTED
CRIMP TYPE:	TRAPEZOIDAL
CYCLE:	1.5 SECONDS, APPROXIMATELY
CONTROL:	MICROPROCESSOR-CONTROLLED CAM DRIVE
UNIT COUNTER:	LCD DISPLAY
CHANGING CRIMP MECHANISM:	UNDER 10 SECONDS
DIMENSIONS (W X H X D):	6.5 X 10.6 X 12.6 INCHES (165 X 270 X 320 MM)
WEIGHT:	26 POUNDS (12 KG)

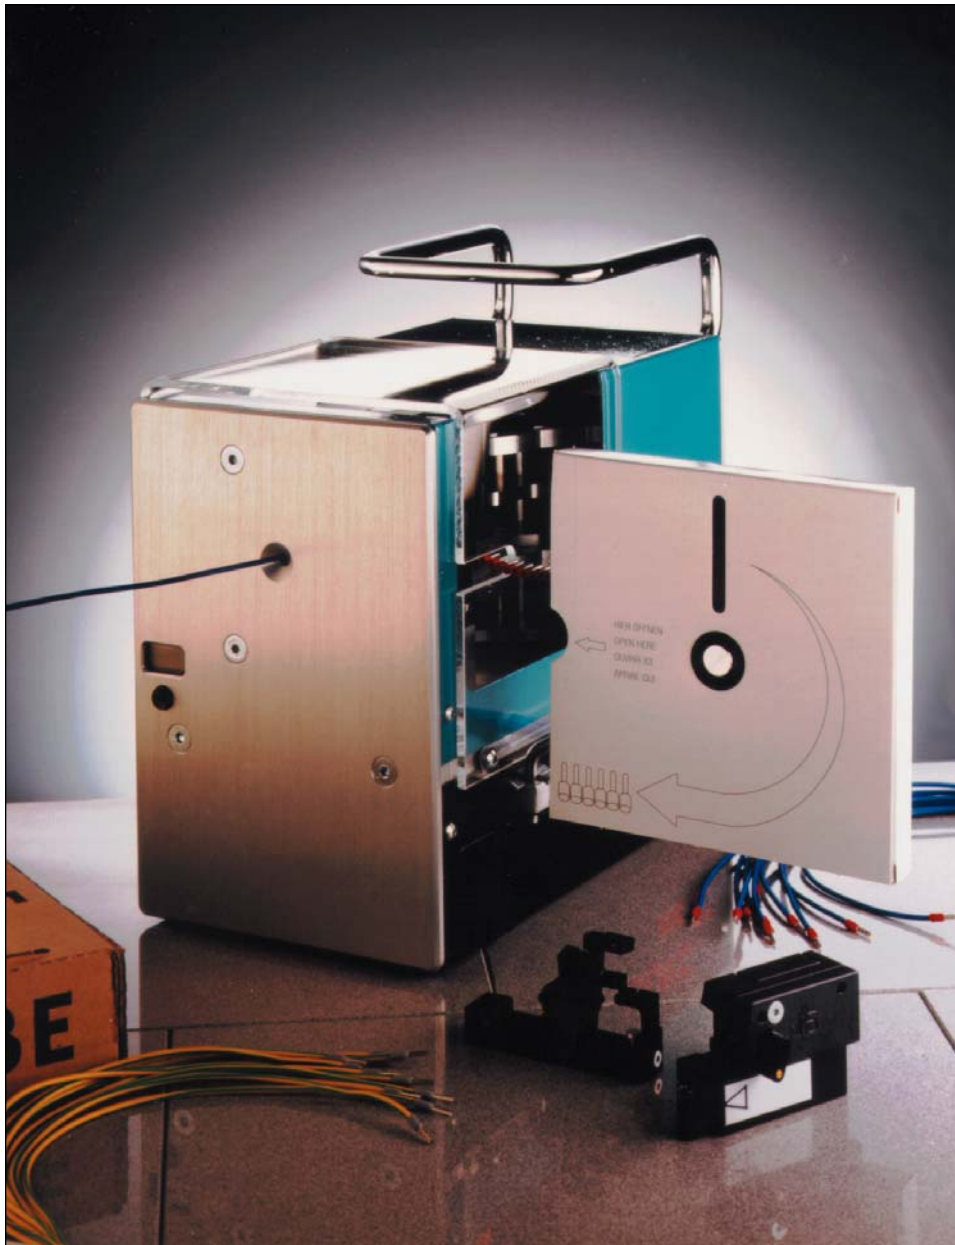

WIRE FERRULES - TAPE MOUNTED FOR THE MC 25

SIZE MM ²	LENGTH MM	PART NO.	COLOR CODE DIN	PART NO.	COLOR CODE T	PART NO.	COLOR CODE W	PIECES PER BOX
0.50	8	MC1050	WHITE	MC3050	WHITE	MC2050	ORANGE	1000
0.75	8	MC1075	GRAY	MC3075	BLUE	MC2075	WHITE	1000
1.00	8	MC1100	RED	MC3100	RED	MC2100	YELLOW	1000
1.50	8	MC1150	BLACK	MC3150	BLACK	MC2150	RED	1000
2.50	8	MC1250	BLUE	MC3250	GRAY	MC2250	BLUE	500

PNEUMATIC CRIMPER

PC 24 - 14 B

BENCH-CRIMPER
TRAPEZOID CRIMPING
SIDE AND FRONT INSERTION
UNIVERSAL - DIE
RANGE 24-14 AWG (0.25-2.50 MM²)
LENGTH: 7.9 INCHES (200 MM)
WEIGHT: 35.2 OUNCES (1000 G)
PRESSURE: 58 PSI (4 BAR)

PC 24 - 14 H

HAND-CRIMPER
TRAPEZOID CRIMPING
SIDE AND FRONT INSERTION
UNIVERSAL - DIE
RANGE 24-14 AWG (0.25-2.50 MM²)
LENGTH: 7.9 INCHES (200 MM)
WEIGHT: 35.2 OUNCES (1000 G)
PRESSURE: 58 PSI (4 BAR)



PC 24 - 14 H
CLOSE UP VIEW

PC 12 - 8 B

BENCH-CRIMPER
TRAPEZOID CRIMPING
SIDE ENTRY
RANGE 12-8 AWG (4-10 MM²)
LENGTH: 7.9 INCHES (200 MM)
WEIGHT: 15.1 OUNCES (430 G)
PRESSURE: 58 PSI (4 BAR)

PC 12 - 8 H

HAND-CRIMPER
TRAPEZOID CRIMPING
SIDE ENTRY
RANGE 12-8 AWG (4-10 MM²)
LENGTH: 7.9 INCHES (200 MM)
WEIGHT: 15.1 OUNCES (430 G)
PRESSURE: 58 PSI (4 BAR)



ACCESSORY EQUIPMENT:

PC - 1

BALANCER

PC - 2

MAGNETIC TOOL HOLDER

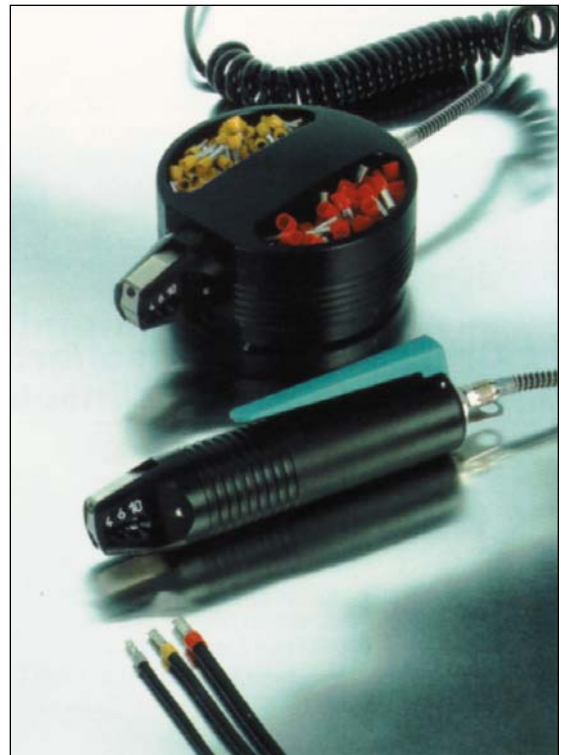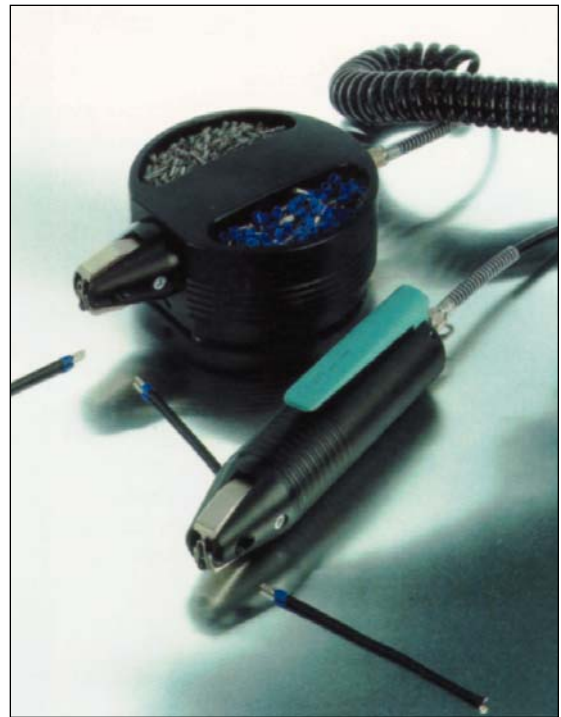

AMERICAN ELECTRICAL, INC.
1811 HUGUENOT ROAD
SUITE NO. 205
MIDLOTHIAN, VA 23113

TELEPHONE: (804) 379 - 2899

FAX: (804) 379 - 8935

DOC9703RO